

Flow rate Indicator / Totalizer

with linearization, analog
and pulse signal outputs



Advantages

- ✓ Save time and gain flexibility with the easy-to-operate through glass keypad: no need to remove the front cover or to arrange a work permit.
- ✓ Your crew is in control with our highly praised “know one, know them all” configuration structure, saving time, cost and aggravation.
- ✓ Easy installation with the spacious chamber and plug and play connectors.
- ✓ Cost saving with an easy to install, 1” NPT thread for flow meter mounting.
- ✓ Durable high grade stainless steel 316L Ex d enclosure for extremely salty atmospheres (offshore).
- ✓ Key information at a glance as the display shows flow rate, total, measuring units and a flow rate indicating speedometer.

Features

- ✓ Explosion proof according [ATEX](#), [IECEx](#), [FM](#) and [CSA c-us](#).
- ✓ Easy K-factor and engineering unit configuration for volumetric or mass.
- ✓ 7 digit flow rate / total and 11 digit accumulated total.
- ✓ 16 point linearization of the flow curve - with interpolation.
- ✓ Bright LED backlight.
- ✓ Power options: Loop powered, battery and 9 - 27V DC.
- ✓ Sensor supply 8.2 / 12 / 24V DC.
- ✓ Data logging to survey information.
- ✓ USB communication for remote configuration or local data extraction.
- ✓ Modbus communication option RS232 / RS485.
- ✓ Easy configurable via PC with [free downloadable configuration tool](#).

Outputs

- ✓ Isolated, loop powered 4 - 20mA output according to linearized flow rate.
- ✓ Scaled pulse output according to linearized accumulated total.

Inputs

- ✓ Ability to process all types of volumetric or mass flow meter signals: Reed-switch, NAMUR, NPN/PNP pulse, Sine wave (coil), Active pulse signals, (o)4 - 20mA and 0 - 10V DC analog inputs.

Applications

- ✓ Flow measurement with mechanical flow meters where a precise calculation over the full measurement range is required.
Or if re-transmission of the flow rate and/or totalizer functions or serial communication is desired.
- ✓ The E112 offers you a flow rate indicator / totalizer designed to be used in rough and tough applications, beyond being just explosion proof. Its sturdy design and ease of use are unequalled by any other explosion proof indicator in the market! The E-Series is always your first and safest choice in explosion proof applications.
- ✓ For intrinsically safe applications we offer our field mount [F-Series](#) indicators.

General information

Introduction

The E112 is a popular model in our range of explosion proof flow rate indicators. The E-series distinguishes itself by its quality and functionality driven European design and manufacturing. It is more than fulfilling the rules for explosion proof design, it is about safety during the daily operation. Often, the environment is much tougher than the explosion proof requirements demand. Thus dangerous conditions may be experienced due to a broken enclosure or a poorly made flame path. Ruggedness and reliability is where Fluidwell stands for and it is now available in a comprehensive well designed and purpose driven explosion proof flow rate indicator / totalizer.

Display

The unique LCD display provides multiple flow data at a glance. The main information is displayed with 7 digits (12mm, 0.47") to show total or flow rate and 11 digits (7mm, 0.28"), which can be set to show flow rate and accumulated total. On-screen engineering units are easily configured from a comprehensive selection, while different units for flow rate and total can be displayed simultaneously. The speedometer offers a quick impression of the actual flow rate. For good readings in full sunlight and darkness, the E112 is provided with a bright backlight. When battery powered the backlight is only operational after a keypad touch, to save battery life.

Configuration

The E-Series uses the highly appreciated configuration structure of our F-, D- and N-Series product lines. Each setting is clearly indicated with an alphanumeric description, which avoids confusing abbreviations. Once familiar with one E-series product, you will be able to program all models in all series without a manual. For example: an (intrinsically safe) F112 operates identical to an explosion proof E112 and has the same three buttons! In other words: know one, know them all.

Remote configuration

Even more user-friendly is the remote configuration via a PC using the free downloadable [E-Series Configuration Software](#). Depending on your product, just connect the E-Series to your PC with the special *Configuration Cable (ACEo2)* or use the Modbus or USB communication cables (*ACEo1/06/07*).

Operation

Operation is done via the optical, easy-to-operate, through glass keypad without having to remove the front cover. These optical keys can be disabled. For easy handheld configuration there are three mechanical push buttons on the bottom side of the display collar. All settings are accessed via a simple operator menu that can be passcode protected.

High grade Stainless Steel 316L enclosure



Easy-to-operate through glass keypad



Robust entry threads



USB communication for local data extraction



Flow meter input

The E112 accepts most input signals for volume flow or mass flow meters. The input signal type can be selected in the configuration menu without having to adjust any sensitive mechanical dip-switches or jumpers. In addition to the average K-Factor, 16 linearization points can be entered with their frequencies or values. The unit will interpolate between these points greatly enhancing accuracy in any flow range.

Analog output

The linearized flow rate is transmitted with the galvanically isolated 4 - 20mA output signal. The E112 can even be loop powered via the isolated loop-current.

Pulse outputs

A scaled pulse output is available according the linearized accumulated total. The pulse length is user defined from 1msec up to 10 seconds. The output can be a passive NPN signal or a mechanical relay output.

Power requirements

Several power inputs are possible to power the E112 and sensor. As standard, the E112 can be loop powered via the isolated, two-wire, analog output. The battery powered version with a long life lithium battery and the basic 9 - 27V DC can power the E112 including the backlight, but don't offer a real sensor supply. A real sensor supply of 8.2, 12 or 24V is optional available with type PD.

Data logging

The data log function can hold up to 2824 logs. Each log contains the flow rate, total, acc. total, time stamp and log number. The log interval can be user defined from every minute up to once every 24 hours. Events like cleared total, changed menu settings or factory reset can also be logged. Once the log is full it will roll over, deleting the oldest data. The log data can be visualized on the LCD but is also easy accessible and downloadable as .CSV file via Modbus or USB communication with our [free software tool](#).

Enclosures

Two fundamental versions of our IP66/IP67, NEMA Type4X/7/8/9 explosion proof enclosures are available: a solid die cast aluminum or a high grade stainless steel 316L enclosure resistant to extremely salty atmospheres (offshore). The aluminum enclosure has an industrial two component coating and is better suitable for outdoor and chemical plant applications than powder coated alternatives. A major advantage for the installation engineer is the spacious mid-chamber for the cable entry in combination with the plug-and-play connectors. Especially for straight flow meter mounting a 1" NPT connection is available (see page 4 for available NPT and Metric threads sizes).

Hazardous areas

The E-Series has been certified according ATEX, IECEx, FM and CSA c-us with an ambient temperature of -40°C to +70°C (-40°F to +158°F).

The application range of the enclosure is very wide:

☑ The **ATEX markings** are:

Gas: **Ex II 2 G Ex d IIC T6 Gb**

Dust: **Ex II 2 D Ex tb IIIC T85°C Db**

☑ The **IECEx markings** are:

Gas: **Ex d IIC T6 Gb**

Dust: **Ex tb IIIC T85°C Db**

☑ The **FM and CSA c-us markings** are:

XP (Explosion-proof): Class I, Division 1, Grps A, B, C, D.


DIP (Dust-Ignition-proof): Class II/III, Division 1, Groups E, F and G. Class I, Zone 1, AEx d IIC T6 Gb, Zone 21, AEx tb IIIC T85°C Db.

Communication


All processed data and settings can be read and modified through the Modbus link (RS232 / RS485) or the local USB communication which is located at the side entry plug.

Under safe conditions, the plug can be removed for easy configuration or data log extraction.


Screenshot Remote Configuration Software

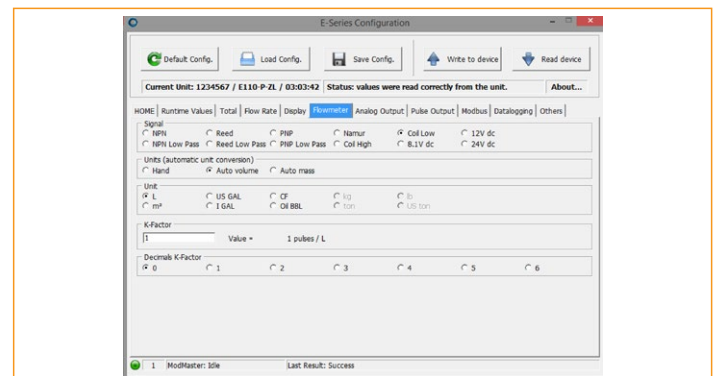

Overview application E112

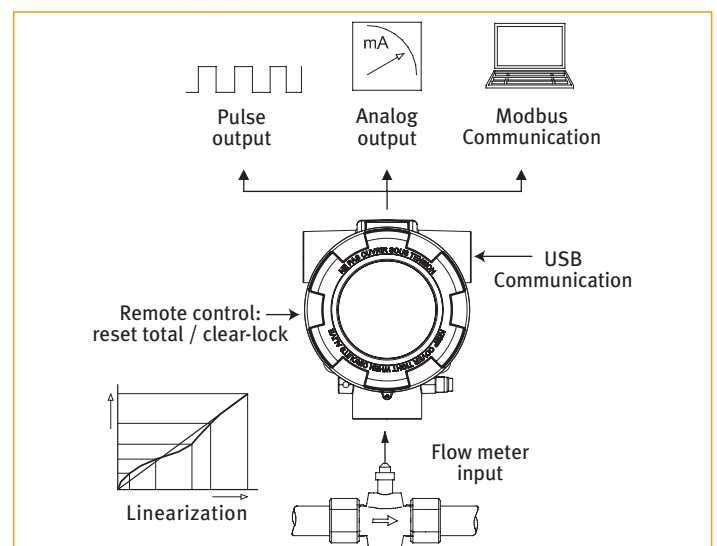

Dimensions enclosures

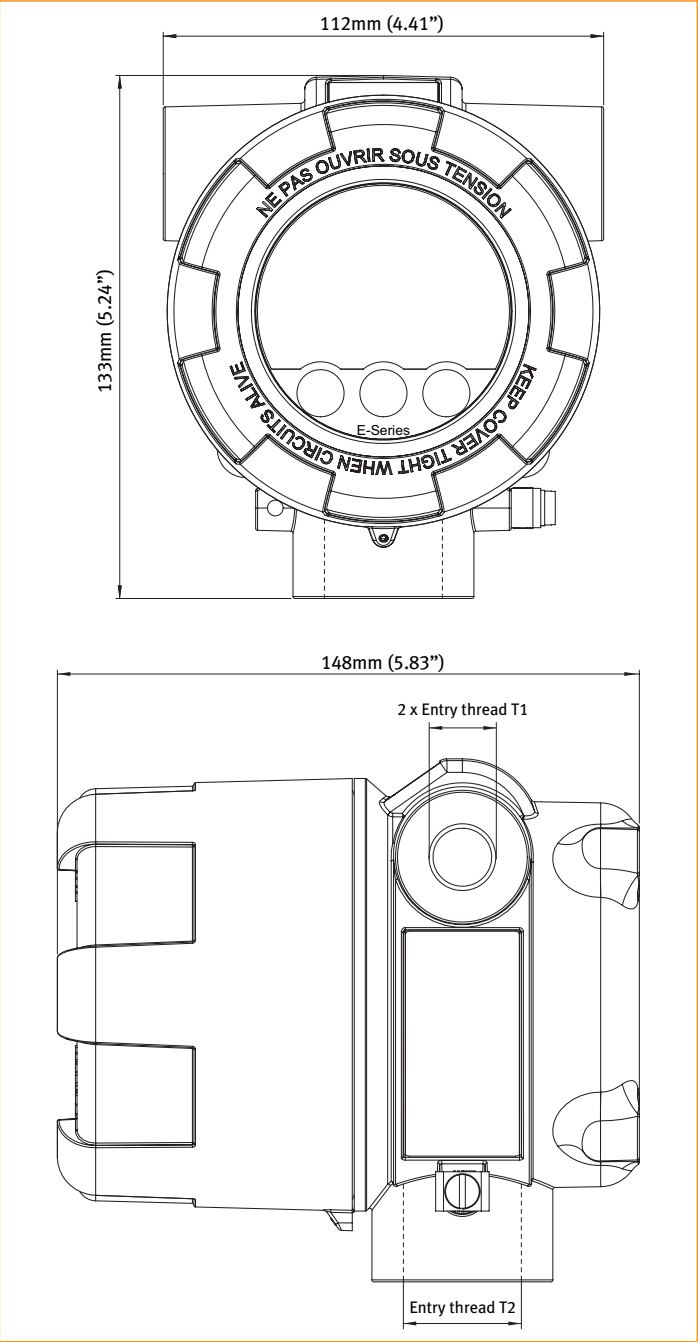

Enclosure types

Type HA_	Aluminum Ex d enclosure.
Weight	1300 gr.
Type HS_	Stainless steel 316L Ex d enclosure.
Weight	3600 gr.

Enclosure drillings

Type H_A	T1: 2 x 3/4" NPT / T2: 1 x 1" NPT
Type H_B	T1: 2 x 3/4" NPT / T2: 1 x 3/4" NPT
Type H_C	T1: 2 x 1/2" NPT / T2: 1 x 1" NPT
Type H_D	T1: 2 x 1/2" NPT / T2: 1 x 3/4" NPT
Type H_G	T1: 2 x M20 / T2: 1 x M25
Type H_H	T1: 2 x M25 / T2: 1x M25

Terminal connections

Main Electronics Module

POWER REQUIREMENTS

P1	P2
----	----

PD: 9 - 27V DC

⊥	+
---	---

PX: 9 - 27V DC

⊥	+
---	---

PULSE OUTPUT

R1	R2	R3
----	----	----

OT: passive transistor output

⊥	+	⊥
---	---	---

PB: battery powered
(PX is standard available: if supply PX/PD is connected, the battery supply will be switched off automatically.)

SENSOR INPUT

S1	S2	S3	P3
----	----	----	----

P: coil

⊥	~	~	8.2 / 12 / 24V
---	---	---	----------------

P: reed switch / NPN

⊥	+	+	8.2 / 12 / 24V
---	---	---	----------------

P: PNP

⊥	-	3V	8.2 / 12 / 24V
---	---	----	----------------

P: namur

⊥	-	3V	8.2 / 12 / 24V
---	---	----	----------------

P: active signal

⊥	+	3V	8.2 / 12 / 24V
---	---	----	----------------

A: (o)4 - 20mA

⊥	I	+	8.2 / 12 / 24V
---	---	---	----------------

U: 0 - 10V

⊥	U	+	8.2 / 12 / 24V
---	---	---	----------------

Note: The sensor supply (P3) is only available with PD.

ADDITIONAL INPUT

E1	E2
----	----

IB: Reset total / Clear-lock

⊥	+	+
---	---	---

COMMUNICATION

C1	C2	C3	C4
----	----	----	----

CB: RS232

⊥	DTR +12V	RXD	TXD
---	----------	-----	-----

CH: RS485 - 2 wire

⊥	A	B
---	---	---

CU: USB Communication

Black	Red	White	Green
-------	-----	-------	-------

LOOP POWERED ANALOG OUTPUT

A1	A2
----	----

AH: Isolated 4 - 20mA

I	+	I	+
---	---	---	---

Note: Non-polarity sensitive.

Supply Module

POWER REQUIREMENTS

P5	P6	P7
----	----	----

PD: 9 - 27V DC*

⊥	+
---	---

PX: 9 - 27V DC*

⊥	+
---	---

PULSE OUTPUT


R8	R9
----	----

OR: Relay output*


COM1	NO1
------	-----

* Type OR requires 24 - 27V DC and power supply via P5-P6, instead of P1-P2


Display example - scale 1:1

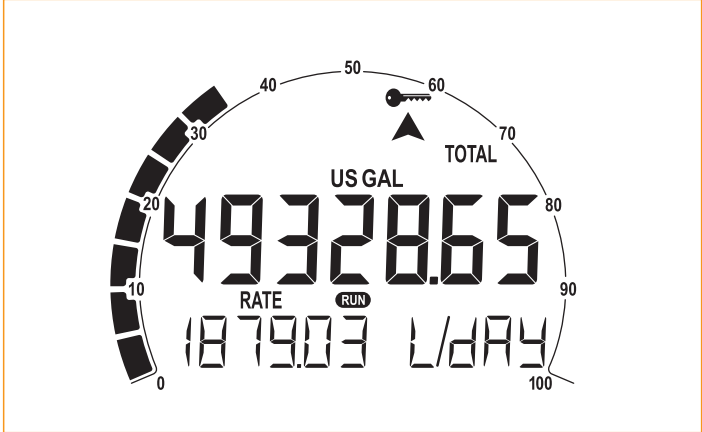

Typical wiring diagram E112-A-AH-CB-IB-OR-PD

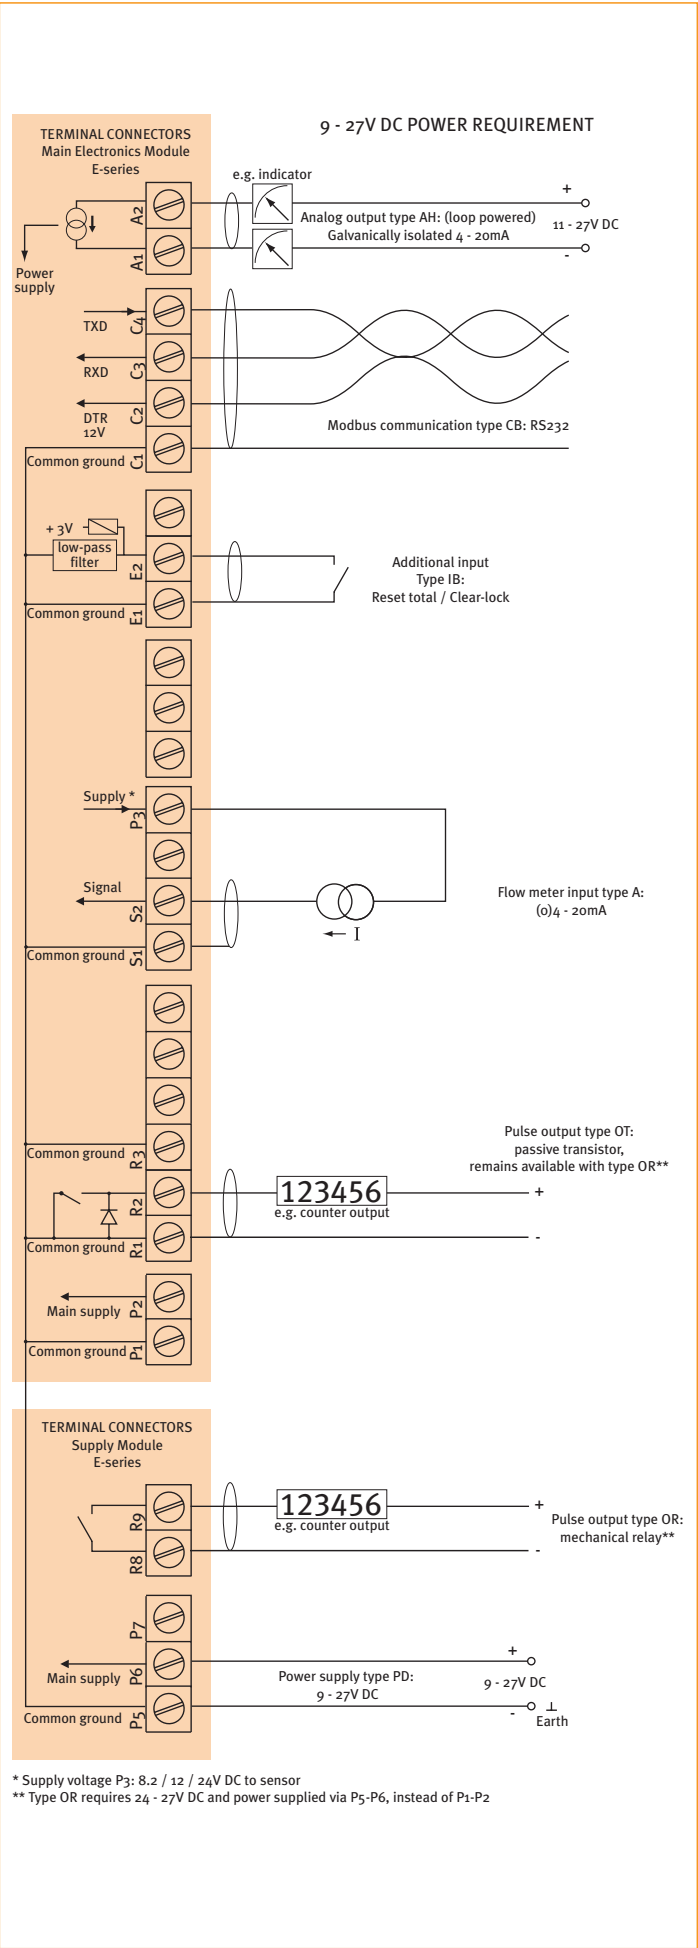

Typical wiring diagram E112-P-AH-CH-IB-OT-PX

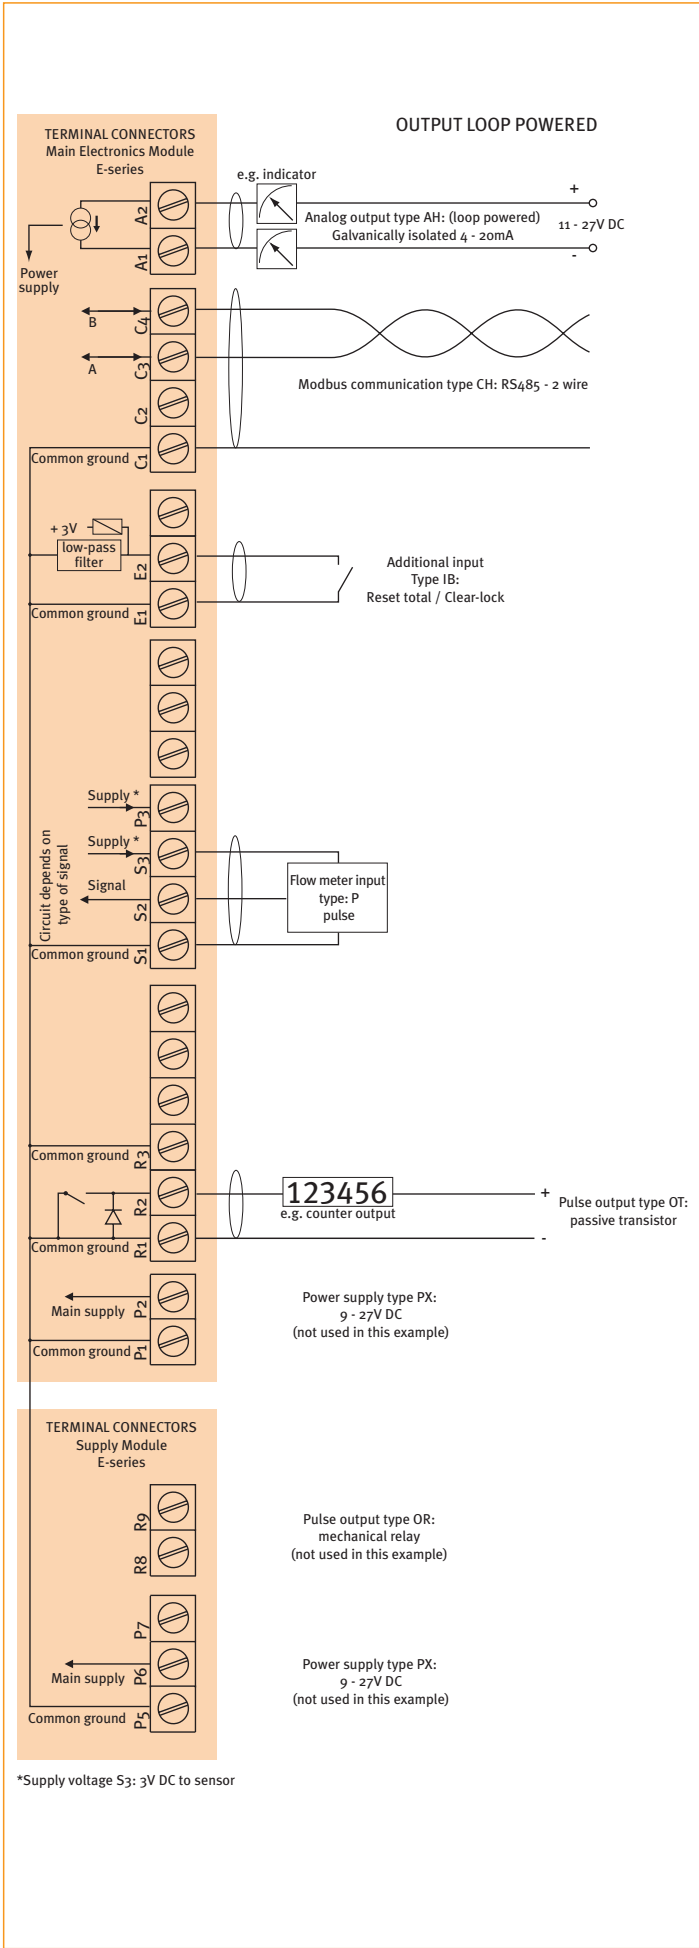

Technical specification

General

Display	
Type	High intensity transfective numeric and alpha-numeric LCD, UV-resistant, with bright backlight. Intensity can be adjusted via the keypad.
Note	When battery powered, the backlight is only operational after a keypad touch to extend the battery lifetime.
Dimensions	Ø 65 x 45mm (2.56" x 1.77").
Digits	Seven 12mm (0.47") and eleven 7mm (0.28") digits. Various symbols and measuring units.
Refresh rate	User definable: 8 times/sec. - 30 secs.
Speedometer	To indicate the actual flow rate the bargraph runs from 0 to 100% in 20 blocks, each block is 5%.

Operating temperature	
Ambient	-40°C to +70°C (-40°F to +158°F).

Power requirements	
Type PB	Long life Lithium battery - life-time depends upon settings and configuration - up to approx. 3 years.
Note PB	The battery can power the backlight for a short time after a keypad touch but cannot power the relay output (OR) or the real sensor supply (Terminal P3).
Type PD	9 - 27V DC. Consumption max. 4.5W
Type PX	9 - 27V DC. Consumption max. 3W.
Type AH	Loop powered, analog output. 11 - 27V DC, Min. 3.5mA. Consumption max. 675mW (25mA @ 27VDC).
Note AH	The loop powered analog output cannot power the backlight, mechanical relay output (OR) or the real sensor supply (Terminal P3).



Sensor excitation	
Type AH/PB/PX	Terminal S3: 3V DC for pulse signals and 1.2V DC for coil pick-up, Iout max. 100µA.
Note	This is not a real sensor supply. Only suitable for sensors with a very low power consumption like coils (sine wave) and reed-switches.
Type PD	Terminal P3: 8.2 / 12 / 24V DC 8.2V DC, Iout max. 20mA. 12V DC, Iout max. 30mA. 24V DC, Iout max. 75mA (this voltage varies depending on the input supply voltage)

Terminal connections	
Type	Removable plug-in terminal strip. Wire max. 1.5mm² and 2.5mm².

Data protection	
Type	EEPROM backup of all settings. Backup of running totals every minute. Data retention at least 10 years.
Pass-code	Configuration settings can be pass-code protected.

Directives & Standards	
EMC	Directive 2014/30/EU, FCC 47 CFR part 15.
Low voltage	Directive 2014/35/EU.
RoHS	Directive 2011/65/EU.
ATEX / IECEx	Directive 2014/34/EU, IEC 60079-0, IEC 60079-1, IEC 60079-31.
FM	Class 3600, 3615, 3616, 3810.
CSA	CSA 22.2 No. 25, No. 30, No. 61010-1-12.
UL	UL 61010-1.
IP & NEMA	EN 60529 & NEMA 250.

Hazardous area

Explosion proof	
Ambient Ta	-40°C to +70°C (-40°F to +158°F).
ATEX certification	Gas:  II 2 G Ex d IIC T6 Gb. Dust:  II 2 D Ex tb IIIC T85°C Db.
IECEx certification	Gas: Ex d IIC T6 Gb. Dust: Ex tb IIIC T85°C Db.
FM & CSA c-us certification	Class I, Div. 1, Grps A, B, C, D. Class II/III, Div. 1, Grps E, F, & G. Class I, Zone 1, AEx d IIC T6 Gb, Zone 21, AEx tb IIIC T85°C Db.

Enclosure

General	
Window	Glass window.
Sealing	Silicone.
Control keys	Three infra-red keys with operation through the glass front window.
Rating	IP66, IP67 / NEMA Type4X / Type7 / Type8 / Type9.
Dimensions	112 x 133 x 148mm (4.41" x 5.24" x 5.83") - W x H x D.

Enclosure types	
Type HA_	Aluminum Ex d enclosure.
Weight	1300 gr. (3.48 lbs).
Type HS_	Stainless steel 316L Ex d enclosure.
Weight	3600 gr. (9.65 lbs).

Enclosure drillings	
Type H_A	Entry threads: 2 x 3/4"NPT / 1 x 1"NPT
Type H_B	Entry threads: 3 x 3/4"NPT
Type H_C	Entry threads: 2 x 1/2"NPT / 1 x 1"NPT
Type H_D	Entry threads: 2 x 1/2"NPT / 1 x 3/4"NPT
Type H_G	Entry threads: 2 x M20 / 1 x M25
Type H_H	Entry threads: 3 x M25

Accessories

General E-Series accessories	
ACEo1	USB data logging and configuration cable for type CU.
ACEo2	Remote configuration cable for type CX.
ACEo3	Stainless steel wall mounting kit (inc. screws+plugs).
ACEo4	Stainless steel pipe mounting kit.
ACEo5	2 pins, 30cm (12") cable with Amphenol connector.
ACEo6	Remote configuration cable (1.8m/5.9ft) for type CH.
ACEo7	Remote configuration cable (1.8m/5.9ft) for type CB.

Signal input

Flow meter sensor	
Type P	Coil / sine wave (COIL-HI: 20mVpp or COIL-LO: 90mVpp sensitivity selectable), NPN, PNP, reedswitch, Namur, active pulse signals 8 or 24V DC.
Frequency	Minimum 0Hz - maximum 10kHz for total and flow rate. Maximum frequency depends on signal type and internal low-pass filter. E.g. reed switch with low-pass filter: max. frequency 120Hz.
K-Factor	0.000010 - 9,999,999 with variable decimal position.
Low-pass filter	Available for all pulse signals.
Option ZF	Coil sensitivity 10mVpp.
Option ZG	Coil sensitivity 5mVpp.
Type A	(0)4 - 20mA. Analog input signal can be scaled to any desired range within 0 - 20mA.
Type U	0 - 10V DC. Analog input signal can be scaled to any desired range within 0 - 10V DC.
Accuracy	16 bit. Low level cut-off programmable. Type A: Error 0.03% @ 20°C (Typical 30ppm/°C). Type U: Error 0.03% @ 20°C (Typical 45ppm/°C).
Span	0.001 / 9,999,999 with variable decimal position.
Update time	Two times per second.
Voltage drop	Type A: max. 1V DC @ 20mA.
Load impedance	Type U: 3kOhm.
Relationship	Linear and square root calculation.
Note	For signal type A and U: external power to sensor is required; e.g. type PD.

Additional input signal

Function	Terminal input to reset total remotely or to lock the “clear total” button.
Type IB	Internally pulled-up switch contact - NPN.
Duration	Minimum pulse duration 100msec.

Signal outputs

Digital output	
Function	Pulse output: Transmitting accumulated total.
Frequency	Max. 500Hz. Pulse length user definable between 1msec up to 10 seconds.
Type OR	One isolated electro-mechanical relay output (NO). Maximum resistive load: 2A @ 250V AC / 30V DC. Maximum inductive load: 0,5A (pilot duty applications). Type OT remains also available.
Restrictions OR	Requires 24 - 27V DC and supplied via P5 - P6. Frequency max. 5Hz.
Type OT	One passive transistor output (NPN) - not isolated. 300mA - 50V @ 25°C.

Analog output

Function	Transmitting flow rate.
Type AH	Galvanically isolated, loop powered 4 - 20mA output
Accuracy	12 bit. Error 0.03% @ 20°C (Typical 45ppm/°C). Output signal can be scaled to any desired range.

Communication option

Function	Reading display information, reading / writing all configuration settings and data log extraction.
Protocol	Modbus ASCII / RTU.
Type CB	RS232
Type CH	RS485 2-wire
Type CU	Local USB communication for connection to a PC / laptop incl. Ex d USB plug at the right-hand side entry.
Restriction CU	Requires 3/4”NPT or M25 side entry thread.
Type CX	No communication, remote configuration possible with accessory cable ACEo2.

Operational

Operator functions	
Displayed functions	<ul style="list-style-type: none">• Linearized flow rate and / or total.• Linearized total and accumulated total.• Indicating speedometer for flow rate.• Reset total by pressing the CLEAR-key twice.

Remote configuration

Function	Easy remote configuration via our free downloadable software and a special communication cable.
Type CB	Requires ACEo7 cable with RS232 to USB plug.
Type CH	Requires ACEo6 cable with RS485 to USB plug.
Type CU	Requires ACEo1 cable with mini USB to USB plug.
Type CX	Requires ACEo2 cable for option CX to USB plug.

Data logging

Function	Records process data over time with real time clock.
Type ZL	Each log containing flowrate, total, acc. total, time/date stamp and log number, requires Type P.
Interval logs	Every: 1 min, 5 min, 10 min, 15 min, 30 min, 1 hr, 2 hr, 3 hr, 4 hr, 6 hr, 8 hr or disable. Max. 1500 interval logs
Daily logs	Configurable time once / twice per day or disable. Max. 600 daily logs.
Event logs	When settings change (manual/Modbus), restart / power failure, factory reset, cleared total or error event. Max. 724 event logs.
Extraction	Via USB (CU) or Modbus communication (CB/CH) as .csv

Total

Digits	7 digits.
Units	L, m³, US gal, igal, cf, Oil bbl, kg, ton, US ton, lb or none.
Decimals	0 - 1 - 2 or 3.
Note	Total can be reset to zero.

Accumulated total

Digits	11 digits.
Units / decimals	According to selection for total.
Note	Can not be reset to zero.

Flow rate

Digits	7 digits.
Units	mL, L, m³, mg, g, kg, ton, US ton, US gal, igal, Oil bbl, lb, cf, rev, none, scf, nm³, nL or p.
Decimals	0 - 1 - 2 or 3.
Time units	/sec - /min - /hr - /day.

Datasheet E112

Robust explosion proof indicator



Reliable

Count on us.

Ordering information (in alphabetical order)

Standard configuration: E112-P-AH-CX-HAA-IB-OT-PX-XD-ZB.

Ordering information: E112		-	-AH	-C	-H	-IB	-O	-P	-XD	-Z
Flow meter input signal										
A	(o)4 - 20mA input.									
P	Pulse input: coil, npn, pnp, namur, reed-switch.									
U	0 - 10V DC input.									
Analogue output signal										
AH	Galvanically isolated, loop powered 4 - 20mA output.									
Communication										
CB	RS232 communication - Modbus ASCII / RTU.									
CH	RS485 communication - 2wire - Modbus ASCII / RTU.									
CU	USB communication incl. Ex d plug - requires 3/4" NPT or M25 entry thread.									
CX	No communication, remote configuration is possible with accessory ACEo2.									
Enclosure types - IP66, IP67 / NEMA Type4X / Type7 / Type8 / Type9.										
HA	Die-cast aluminum Ex d enclosure.									
HS	Stainless steel 316L Ex d enclosure.									
Enclosure drillings										
H_A	Entry threads: 2 x 3/4" NPT / 1 x 1" NPT.									
H_B	Entry threads: 3 x 3/4" NPT.									
H_C	Entry threads: 2 x 1/2" NPT / 1 x 1" NPT.									
H_D	Entry threads: 2 x 1/2" NPT / 1 x 3/4" NPT.									
H_G	Entry threads: 2 x M20 / 1 x M25.									
H_H	Entry threads: 3 x M25.									
Additional input signal										
IB	Remote control input to reset total or to lock the "clear total" button.									
Digital output signal										
OR	Mechanical relay output (OT remains available) - requires 24 - 27V DC.									
OT	Passive transistor output - standard configuration.									
Power requirements										
PD	9 - 27V DC + sensor supply.									
PX	Basic power input 9 - 27V DC (no real sensor supply).									
Additional battery supply (optional)										
PB	Lithium battery powered.									
Hazardous area										
XD	Explosion proof enclosure according ATEX, IECEx, FM and CSA c-us.									
Other options										
ZB	Backlight is included as standard.									
ZF	Coil input 10mVpp.									
ZG	Coil input 5mVpp.									
ZL	Data logging to survey information - requires Type P.									
ZM	Extra manual in "DE-German" and/or "ES-Spanish". English and French manuals are included as standard.									

The bold marked text contains the standard configuration.



Fluidwell bv
P.O. Box 6 • 5460 AA • Veghel
Voltaweg 23 • 5466 AZ • Veghel
The Netherlands

Telephone: +31 (0) 413 - 343 786
Telefax: +31 (0) 413 - 363 443
Email: displays@fluidwell.com
Internet: www.fluidwell.com



Important: specifications are subject to change without notice.
Copyright: Fluidwell bv - 2017 - E112-DATA-EN-V17o8