

GENERAL PURPOSE INDICATOR

LOOP POWERED WITH VERY LARGE DIGITS



Features

- Universal loop powered indicator.
- Very large 26mm (1") high digits.
- Displays the actual value, measuring unit and loop current.
- Selectable on-screen engineering units: %, PPM, meter, m, cm, mm, ft, sqft, ML, L, NL, M³, nM³, GAL, USGAL, IGAL, bbl, CUFT, mg, g, kg, ton, lb, psi, psig, mbar, bar, barg, °C, °F, K, P, RPM, K, KPA, pH, mV, /sec, /min, /hr, /day or no unit (others on request).
- Piegraph indication: ten segments.
- Number of digits: 5^{1/2}.
- Green/amber LED backlight with adjustable intensity.
- Operational temperature -40°C to +80°C (-40°F to 176°F).
- Environmental protection to IP67 (NEMA4X).
- Intrinsically Safe - ATEX, IECEx, FM and CSA approval for gas and dust applications.

Signal input

- 4 - 20mA.

Power supply

- Loop powered.

Applications

- The F090 takes operating energy from an input current (2-wire 4 - 20mA) and reduces installation cost. It accepts a wide range of process instruments, including flow (linear or square root), level, pressure and temperature transmitters. All these process parameters can be displayed in their own engineering units. The F090 is, like other F-Series, optional available with Intrinsic Safety for hazardous area applications.

General information

Introduction

The F090 is a local indicator to display the actual process value, range and loop current. The measuring unit to be displayed is simply selected through an alpha-numerical configuration menu. No adhesive labels have to be put on the outside of the enclosure: a weather proof and user friendly solution! The configuration of Span, offset and number of decimals is done through software functions, without any sensitive dip-switches or trimmers. A wide selection of options further enhances the capabilities of this model, including Intrinsic Safety for hazardous area applications.

Display

The display has 5 1/2 large 26mm (1") digits to show the main process information. At the bottom line, smaller 8mm (0.31") alphanumeric digits are available to display the measuring unit and additional messages in case of an alarm; range error e.g. With the piegraph, an actual range indication is offered in a single glance. If desired, additional information can be presented after pressing the select key, like the actual loop current and the 0% and 100% process value. As the F090 has been designed for field mounted applications, a smart display update function has been incorporated to achieve a readable display even at -40°C (-40°F).

Backlight

For those applications where readability during day and night might be an issue, a bi-color backlight is available. The background color can be set to green or amber and the intensity can be adjusted from the keyboard. The display is a transfective type, which means that a high contrast reading is guaranteed in full sunlight as well as during the night. This backlight option is also available Intrinsically Safe.

Configuration

All configuration settings are accessed via a simple operator menu which can be pass-code protected. Each setting is clearly indicated with an alphanumeric description, which avoids confusing abbreviations and baffling codes. Once familiar with one F-series product, you will be able to program all models in the series

without a manual. All settings are safely stored in EEPROM memory in the event of sudden power failure.

Signal input

The F090 does accept 4 - 20mA input signals only. The input signal type can be tuned and set by the user in the configuration menu without having to adjust any sensitive mechanical dip-switches, jumpers or trimmers.

Power supply

The F090 is designed to be a loop powered indicator, which means it takes its operating energy from an input current (2-wire 4 - 20mA).


Hazardous area

For hazardous area applications, this model has been ATEX, IECEx, FM and CSA certified Intrinsically Safe for gas and dust applications, with an allowed operational temperature of -40°C to +70°C (-40°F to +158°F).

Enclosures

Various types of enclosures can be selected, all ATEX, IECEx, FM and CSA approved. As standard the F090 is supplied in a rugged GRP panel mount enclosure, which can be converted to an IP67 / NEMA 4X GRP field mount enclosure by the addition of a back case. Most popular is our aluminum field mount enclosure with IP67 / NEMA 4X rating. Both European or U.S. cable gland entry threads are available.

Overview application F090

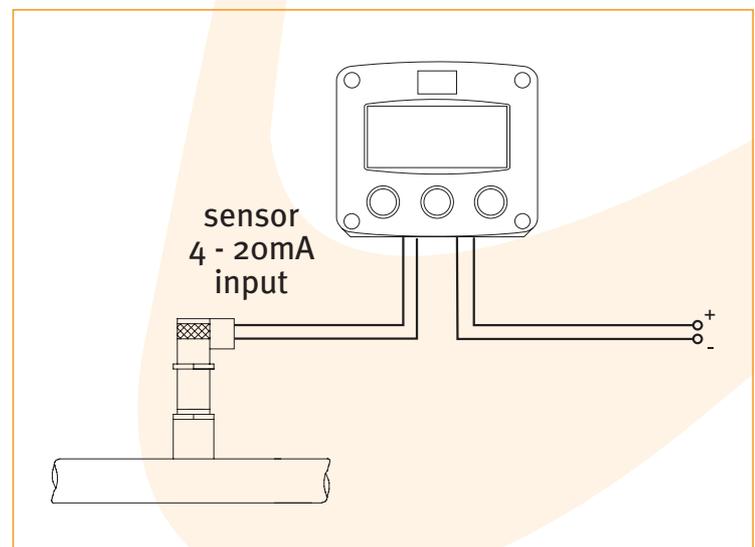

Hazardous area applications

The F090-XI has been certified according ATEX and IECEx by KEMA and according CSA c-us and FM for use in Intrinsically Safe applications with an ambient temperature of -40°C to +70°C (-40°F to +158°F).

- The ATEX markings for gas and dust applications are:

Ex II 1 G Ex ia IIC T4
II 1 D Ex iaD 20 IP 65/67 T 100 [C].

- The IECEx markings for gas and dust applications are: **Ga Ex ia IIC T4** and **Ex iaD 20 IP 65/67 T100** [C].
- The CSA c-us markings are: **Class I/II/III, Division 1, Groups A, B, C, D, E, F, G, Temperature class T4 and Class I, Zone 0, AEx ia IIC T4.**
- The FM markings are: **Class I/II/III, Division 1, Groups A, B, C, D, E, F, G, Temperature class T4 and Class I, Zone 0, AEx ia IIC T4.**


It is allowed to connect up to two I.S. power supplies to power the unit and backlight. Consult the certificate for the maximum input and output values of the circuits.

Certificate of conformity KEMA 05ATEX1168 X

• IECEx KEM 08.0006X • CSA.08.2059461 X



Configuration example IIA - IIB and IIC - Fogo-A-PL-XI-ZB - Input loop powered

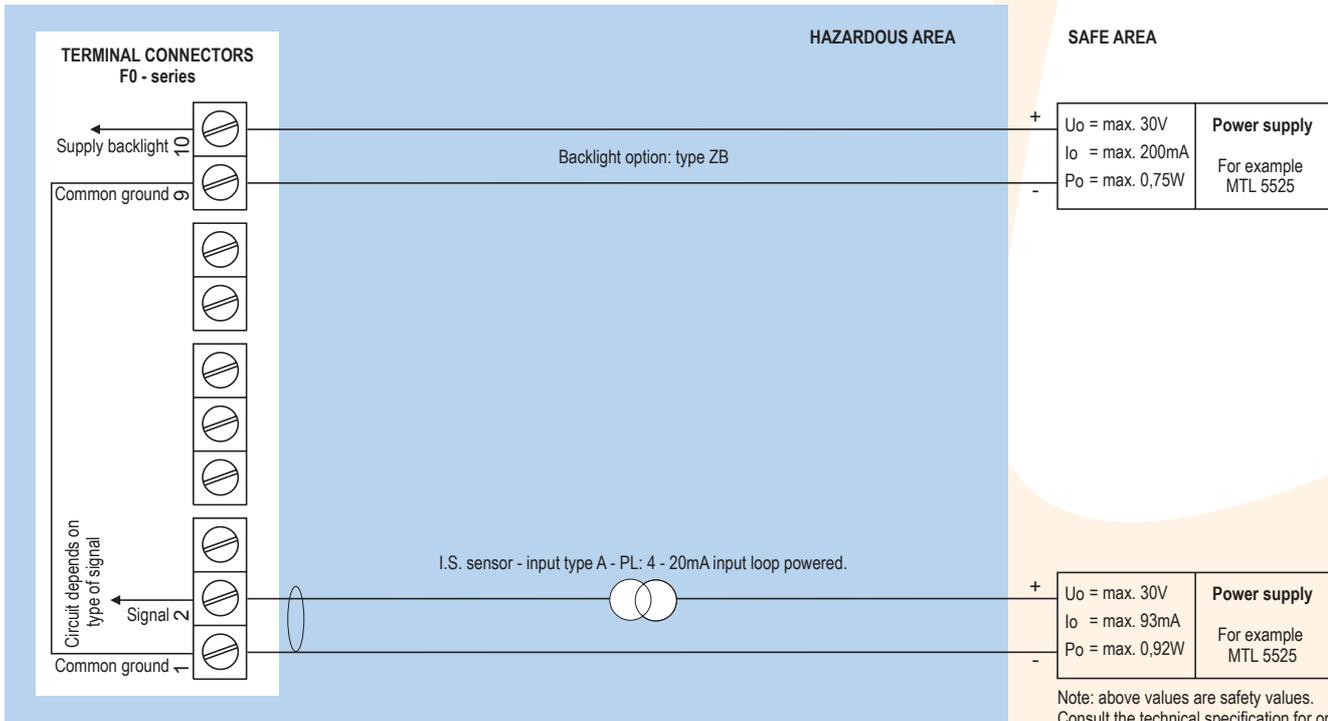

Sensor supply is not available: unit is input loop powered (type PL).

Technical specification

General

| Display | |
|------------|--|
| Type | High intensity reflective numeric and alphanumeric LCD, UV-resistant. |
| Dimensions | 90 x 40mm (3.5" x 1.6"). |
| Digits | 5½ very large 26mm (1") and eleven 8mm (0.31") digits. Various symbols and measuring units. |
| Piegraph | 10 segment range indication in relation to its measuring range 0 - 100% |
| Option ZB | Transflective LCD with bi-color LED-backlight; green / amber. Intensity and color selected through the keyboard. |

| Piegraph | |
|----------|---|
| Digits | 10 segments. |
| Relation | To the min. and max. input signal (0 - 100%). |

| Operating temperature | |
|-----------------------|-----------------------------------|
| Standard unit | -40°C to +80°C (-40°F to +176°F). |
| Intrinsically Safe | -40°C to +70°C (-40°F to +158°F). |

| Power requirements | |
|--------------------|--|
| Type PL | Input loop powered from sensor signal 4 - 20mA |
| Type ZB | For backlight 20 - 30V DC. Power consumption max. 1 Watt. |
| Note | For Intrinsically Safe applications, consult the safety values in the certificate. |

| Terminal connections | |
|----------------------|---|
| Type | Removable plug-in terminal strip. Wire max. 1.5mm². |

| Data protection | |
|-----------------|--|
| Type | EEPROM backup of all settings. Data retention at least 10 years. |
| Pass-code | Configuration settings can be pass-code protected. |

Hazardous area

| Intrinsically Safe | |
|------------------------|---|
| ATEX certification |  II 1 G Ex ia IIC T4. II 1 D Ex iaD 20 IP 65 / 67 T 100 °C. |
| IECEX certification |  Ga Ex ia IIC T4. Ex iaD 20 IP 65 / 67 T 100 °C. |
| CSA c-us certification |  Intrinsically Safe for Class I/II/III, Div. 1, Groups A, B, C, D, E, F, G, Temp. class T4 and Class I, Zone o, AEx ia IIC T4. |
| FM certification |  Intrinsically Safe for Class I/II/III, Div. 1, Groups A, B, C, D, E, F, G, Temp. class T4 and Class I, Zone o, AEx ia IIC T4. |
| Ambient Ta | -40°C to +70°C (-40°F to +158°F). |

| Environment | |
|-------------------------------|--|
| Electromagnetic compatibility | Compliant ref: EN 61326 (1997), EN 61010-1 (1993). |

Signal input

| Sensor | |
|--------------|---|
| Type A | 4 - 20mA. Analog input signal can be scaled to any desired range within 4 - 20mA. |
| Accuracy | Resolution: 16 bit. Error < 0.01mA / ± 0.05% FS. Low level cut-off programmable. |
| Span | 0.0001 / 199,999 with variable decimal position. |
| Offset | -99,999 / +199,999 units. |
| Update time | Four times per second. |
| Voltage drop | Max. 2.6V DC @ 20mA. |
| Relationship | Linear and square root calculation. |

Casing

| General | |
|--------------|---|
| Window | Polycarbonate window. |
| Sealing | Silicone. |
| Control keys | Three industrial micro-switch keys. UV-resistant silicone keypad. |

| Aluminum wall / field mount enclosures | |
|--|--|
| General | Die-cast aluminum wall/field mount enclosure IP67 / NEMA 4X with 2-component UV-resistant coating. |
| Dimensions | 130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D. |
| Weight | 1100 gr. |
| Type HA | Cable entry: 2 x PG9 and 1 x M20. |
| Type HM | Cable entry: 2 x M16 and 1 x M20. |
| Type HN | Cable entry: 1 x M20. |
| Type HO | Cable entry: 2 x M20. |
| Type HP | Cable entry: 6 x M12. |
| Type HT | Cable entry: 1 x ½" NPT. |
| Type HU | Cable entry: 3 x ½" NPT. |
| Type HV | Cable entry: 4 x M20. |
| Type HZ | Cable entry: no holes. |

| GRP wall / field mount enclosures | |
|-----------------------------------|--|
| General | GRP wall/field mount enclosure IP67 / NEMA 4X, UV-resistant and flame retardant. |
| Dimensions | 130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D. |
| Weight | 600 gr. |
| Type HD | Cable entry: no holes. |
| Type HE | Cable entry: 2 x Ø 16mm and 1 x Ø 20mm. |
| Type HF | Cable entry: 1 x Ø 22mm (7/8"). |
| Type HG | Cable entry: 2 x Ø 20mm. |
| Type HH | Cable entry: 6 x Ø 12mm. |
| Type HJ | Cable entry: 3 x Ø 22mm (7/8"). |
| Type HK | Flat bottom, cable entry: no holes. |

| Panel mount enclosures | |
|------------------------|---|
| Dimensions | 130 x 120 x 60mm (5.12" x 4.72" x 2.36") - W x H x D. |
| Panel cut-out | 115 x 98mm (4.53" x 3.86") L x H. |
| Type HB | Die-cast aluminum panel mount enclosure IP65 / NEMA 4X. |
| Weight | 600 gr. |
| Type HC | GRP panel mount enclosure IP65 / NEMA 4X, UV-resistant and flame retardant. |
| Weight | 450 gr. |

| ABS wall / field mount enclosures | |
|-----------------------------------|--|
| General | Silicone free ABS wall/field mount enclosure IP65 with EPDM and PE sealings. UV-resistant polyester keypad (old HD enclosure). |
| Dimensions | 130 x 114 x 71mm (5.1" x 4.5" x 2.8") - W x H x D. |
| Weight | 450 gr. |
| Type HS | Cable entry: no holes. |

Operational

| Operator functions | |
|---------------------|--|
| Displayed functions | <ul style="list-style-type: none"> • Top line: main display value. • Bottom line: measuring unit and messages. • Piegraph: 10 segments related to input signal. • Actual sensor input value in mA. • Displayed value at 0% of the input signal. • Displayed value at 100% of the input signal. |

| Total | |
|------------|---|
| Digits | 5½ digits (height 26mm / 1"). |
| Units | m - mL - L - nL - M³ - nM³ - mg - g - kg - ton - gal - sgal - igal - lb - bbl - cf - scf - p - rev - °C - °F - °K - % - mm - cm - mtr - inch - ft - mmwk - mmwc - cmwk - cmwc - mwk - mwc - inwc - ftwc - mbar - bar - psi - pH - mV - no unit. |
| Time units | /sec - /min - /hr - /day - no unit. |
| Decimals | 0 - 1 - 2 - 3 - 4 or 5. |

Ordering information

Standard configuration: Fogo-A-HC-PL-XX-ZX.

| ordering information: | F090 | -A | -H | -PL | -X | -Z |
|---|---|----|----|-----|----|----|
| Sensor input signal | | | | | | |
| A  | 4 - 20mA input. | | | | | |
| Panel mount enclosures - IP65 / NEMA4X | | | | | | |
| HB  | Aluminum enclosure. | | | | | |
| HC  | GRP enclosure. | | | | | |
| GRP field / wall mount enclosures - IP67 / NEMA4X | | | | | | |
| HD  | Cable entry: no holes. | | | | | |
| HE  | Cable entry: 2 x Ø 16mm & 1 x Ø 20mm. | | | | | |
| HF  | Cable entry: 1 x Ø 22mm (7/8"). | | | | | |
| HG  | Cable entry: 2 x Ø 20mm. | | | | | |
| HH  | Cable entry: 6 x Ø 12mm. | | | | | |
| HJ  | Cable entry: 3 x Ø 22mm (7/8"). | | | | | |
| HK  | Flat bottom, cable entry: no holes. | | | | | |
| Aluminum field / wall mount enclosures - IP67 / NEMA4X | | | | | | |
| HA  | Cable entry: 2 x PG9 + 1 x M20. | | | | | |
| HM  | Cable entry: 2 x M16 + 1 x M20. | | | | | |
| HN  | Cable entry: 1 x M20. | | | | | |
| HO  | Cable entry: 2 x M20. | | | | | |
| HP  | Cable entry: 6 x M12. | | | | | |
| HT  | Cable entry: 1 x 1/2" NPT. | | | | | |
| HU  | Cable entry: 3 x 1/2" NPT. | | | | | |
| HV  | Cable entry: 4 x M20. | | | | | |
| HZ  | Cable entry: no holes. | | | | | |
| ABS field / wall mount enclosures - IP65 | | | | | | |
| HS  | Silicone free ABS field enclosure – Cable entry: no holes (old HD enclosure). | | | | | |
| Power supply | | | | | | |
| PL  | Input loop powered from sensor signal 4 - 20mA (type A). | | | | | |
| Hazardous area | | | | | | |
| XI  | Intrinsically Safe, according ATEX, IECEx, CSA c-us and FM. | | | | | |
| XX | Safe area only. | | | | | |
| Other options | | | | | | |
| ZB  | Backlight. | | | | | |
| ZX  | No options. | | | | | |

The bold marked text contains the standard configuration.

 Available Intrinsically Safe.

Specifications are subject to change without notice.



Fluidwell bv
P.O. Box 6
5460 AA - Veghel - The Netherlands
Tel.: +31 (0)413 343786
Fax.: +31 (0)413 363443
sales@fluidwell.com
Internet: www.fluidwell.com

