

FEATURES

- Remote-controlled valves with disc for industrial fluids
- Anti-waterhammer design (fluid entry under the disc)
- Vacuum operation up to 10^{-2} mbar
- Wide range of piston-type operators (63 - 90 - 125 mm dia.) rotatable through 360°, for maximum performance at different minimum pilot pressures
- High performance, maintenance-free stuffing box
- The valves satisfy Pressure Equipment Directive 97/23/EC, category 1 (DN > 25) or article 3.3 (DN 25)

GENERAL

Differential pressure	See «SPECIFICATIONS» [1 bar = 100 kPa]
Maximum allowable pressure	16 bar
Ambient temperature range	-10°C to +60°C
Maximum viscosity	600 cSt (mm²/s)
Pilot fluid	Filtered air or water ⁽¹⁾
Max. pilot pressure	10 bar
Min. pilot pressure	See below and following page
Pilot fluid temperature	-10°C to +60°C
Response time	See page V402-7

fluids (*)	temperature range	disc seal (*)
air and gas groups 1 & 2 water, oil, liquids groups 1 & 2 and steam	- 10°C to + 184°C	PTFE

CONSTRUCTION

Connection	Flange type 21 (ISO 7005) - PN 16
Facing	Type A

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

Valve body	Bronze
Stuffing box housing	Brass
Stem	Stainless steel
Disc	Brass
Stuffing box packing	PTFE chevrons
Wiper seal	FPM
Disc seal	PTFE
Valve body seal	PTFE


OTHER MATERIALS

Operator	Glass fibre filled PA
Optical position indicator	PA 12, supplied standard on valves with 63, 90 and 125 mm operators

⁽¹⁾ For dia. 63, 90 and 125 mm operators: At service fluid temperatures inside the valve body above 100°C, it is prohibited to pilot the valve with water.

SPECIFICATIONS

DN	orifice size	flow coefficient Kv		pilot pressure (bar)		operating pressure differential (bar)				operator diameter	catalogue number
						min.	max.				
	(mm)	(m³/h)	(l/min)	min.	max.		air inert gas (*)	water, oil, liquids (*)	steam (*) (≤184°C)	(mm)	
NC - Normally closed, entry under the disc ⁽¹⁾											
25	25	12	200	4	10	0	10	10	10	63	T290A010
							16	16	10	90	T290A011
				2,5	10	0	6	6	6	63	T290A008
							12	12	10	90	T290A009
				1,5	10	0	3	3	3	63	T290A006
							5	5	5	90	T290A007
32	32	18	300	4	10	0	6	6	6	63	T290A016
							12	12	10	90	T290A017
				2,5	10	0	3	3	3	63	T290A014
							7	7	7	90	T290A015
				1,5	10	0	1,5	1,5	1,5	63	T290A012
							3	3	3	90	T290A013
		19	317	4	10	0	16	16	10	125	T290A642
				2,5	10	0	16	16	10	125	T290A641
				1,5	10	0	10	10	10	125	T290A640
							4	4	4	63	T290A020
							8	8	8	90	T290A021
							4	4	4	90	T290A019
40	40	32	530	1,5	10	0	3	3	3	90	T290A018
				4	10	0	16	16	10	125	T290A482
				2,5	10	0	10	10	10	125	T290A481
		35	583	1,5	10	0	4	4	4	125	T290A480
							2,5	2,5	2,5	63	T290A024
							6	6	6	90	T290A025
50	50	39	650	2,5	10	0	2,5	2,5	2,5	90	T290A023
				1,5	10	0	1	1	1	90	T290A022
				4	10	0	10	10	10	125	T290A485
		44	733	2,5	10	0	5	5	5	125	T290A484
				1,5	10	0	2	2	2	125	T290A483

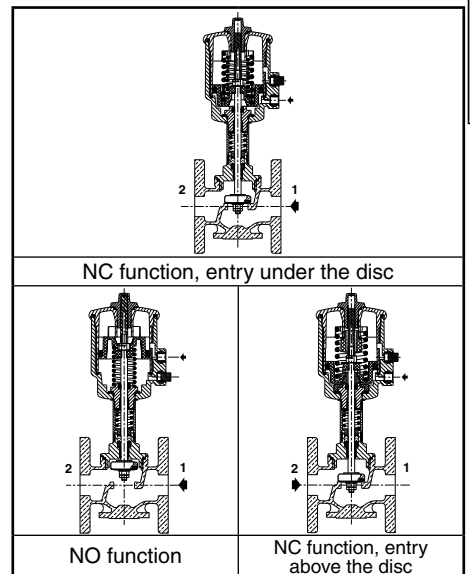

SPECIFICATIONS

DN	orifice size	flow coefficient Kv		pilot pressure (bar)		operating pressure differential (bar)				operator diameter	catalogue number
						min.	max.				
	(mm)	(m³/h)	(l/min)	min.	max.		air inert gas (*)	water, oil, liquids (*)	steam (*) (≤184°C)	(mm)	
NO - Normally open, entry under the disc											
25	25	12	200	II (*)	10	0	16	16	10	63	T290A028
				III (*)	10	0	16	16	10	90	T290A029
				II (*)	10	0	16	16	10	63	T290A030
32	32	18	300	III (*)	10	0	16	16	10	90	T290A031
				IV (*)	10	0	16	16	10	125	T290A643
		32	530	II (*)	10	0	11	11	10	63	T290A032
40	40	35	583	III (*)	10	0	16	16	10	90	T290A033
				IV (*)	10	0	16	16	10	125	T290A489
				II (*)	10	0	7	7	7	63	T290A034
50	50	39	650	III (*)	10	0	13	13	10	90	T290A035
				IV (*)	10	0	16	16	10	125	T290A490
		44	733	NC - Normally closed, entry above the disc (version recommended for rapid-cycling steam applications)							
25	25	12	200	VI (*)	10	0	10	-	10	63	T290A038
32	32	18	300	VI (*)	10	0	10	-	10	63	T290A039
				VII (*)	10	0	10	-	10	90	T290A136
40	40	32	530	VI (*)	10	0	10	-	10	63	T290A040
				VII (*)	10	0	10	-	10	90	T290A041
50	50	39	650	VI (*)	10	0	9	-	9	63	T290A042
				VII (*)	10	0	10	-	10	90	T290A043

(*) Minimum pilot pressure varies with differential pressure, see page V402-7.

(1) Calculation of the minimum pilot pressure at a ΔP of max. 10 bar with allowable backpressure (backpressure not recommended with liquids as waterhammer may occur)
63, 90 and 125 mm operators, 4 bar minimum pilot pressure version: add 1,5 bar to the minimum pilot pressure of chart VI, VII or VIII, page V402-7.

OPTIONS AND ACCESSORIES (see page V435/V436)

- Signaling box or compact signaling unit
- Stroke limiter for opening
- Manual safety device
- Adapter plate for NAMUR pad mounting pilot
- Oxygen service, pressure limited to 15 bar, temperature limited to + 60°C
- Vacuum applications up to 1,33 10⁻³ mbar
- ATEX 94/9/EC versions for potentially explosive atmospheres

INSTALLATION


- The valves can be mounted in any position without affecting operation
- Compatible with ASTM 1, 2 and 3 oils
- Installation/maintenance instructions are included with each valve

SPARE PARTS KITS

DN	spare parts kit no.
	Ø 63-90-125 mm
25	C140017 ⁽²⁾
32	C140018 ⁽²⁾
40	C140019 ⁽²⁾
50	C140020 ⁽²⁾

(2) Standard suffix VM also applies to kits (see V435).

DIMENSIONS (mm), WEIGHT

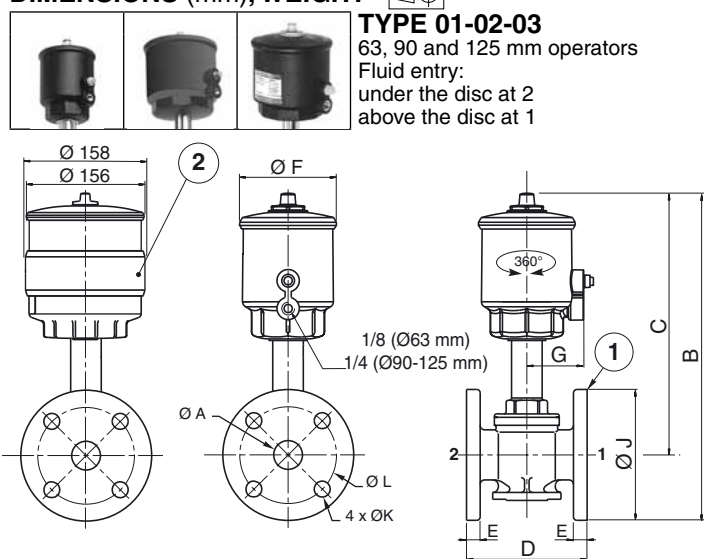

(1) Flange type 21 with flat faces, type A (ISO 7005)

(2) Operator dia. 125 mm, NO function

All leaflets are available on: www.asconumatics.eu

ORDERING EXAMPLES:

T	290 A 010	
T	290 A 011	SM2
T	290 A 030	
pipe thread		
basic number		suffix

ORDERING EXAMPLES KITS:

C140017	
C140018	
C140019	VM
basic number	suffix

type	operator diameter	ØA	B	C	D	E	ØF	G	ØJ	ØK	ØL	weight ⁽³⁾
01	63	25	288	230	110	12	85	50,5	115	14	85	3,9
		32	313	243	130	14	85	50,5	140	18	100	5,9
		40	329	254	140	14	85	50,5	150	18	110	7,1
		50	354	271	160	16	85	50,5	165	18	125	10,5
		63	378	283	180	18	85	50,5	180	18	150	13,6
02	90	25	303	246	110	12	118	67	115	14	85	4,5
		32	325	255	130	14	118	67	140	18	100	6,5
		40	341	266	140	14	118	67	150	18	110	7,7
		50	365	283	160	16	118	67	165	18	125	11,1
		63	378	308	180	18	118	67	180	18	150	13,6
03	125	32	378	308	130	14	156	86	140	18	100	9
		40	394	319	140	14	156	86	150	18	110	10,2
		50	418	336	160	16	156	86	165	18	125	13,6

(3) Weight of valve without pilot. Add 0,2 for dia. 125 mm operator NO.

Solenoid pilot valves: see V439 (63 mm operator) / V444 (90 and 125 mm operators).